



Project _____
 Item # _____ Quantity _____
 Model # _____



Warming Tray

(Model Shown: ST-1220 & ST-1220-T)

Model #	Voltage	Peak Power	Overall Width
ST-1220 (US)	110-120	230 W	24.2" (615 mm)
ST-1220-T (US)	110-120	230 W	23.8" (605 mm)
ST-3915-T (US)	110-120	450 W	38.5" (978 mm)
ST-1223 (Int'l)	220-240	230 W	24.2" (615 mm)
ST-1223U (UK)	220-240	230 W	24.2" (615 mm)

Description:

Spring USA's Warming Tray is an economical buffet solution with a low profile design that pairs well with heat lamps. With an adjustable temperature knob, the Warming Tray keeps properly prepared food at the appropriate temperature for serving.

Construction & Performance Features:

- Easy to clean, black, tempered glass top
- Stainless steel body available in satin stainless or titanium finish
- Low profile design
- 5.5 ft. (1.7 m) power cord
- ON/OFF switch
- Temperature adjustment knob
- Surface temperature range 80°F - 200°F (27°C - 93°C)

Standard Warranty (US versions only):

- One year for manufacturer defects

Agency Listings:

US Versions

- ETL
- NSF 4
- UL 197
- CSA STD C22.2 No. 109



Int'l and UK Versions

- CE
- RoHS
- TÜV



Available Accessories:


- Stainless Steel Riser for ST-1220 [Item #STS-1220]
- Stainless Steel Riser for ST-1220-T [Item #STS-1220-SS]
- Titanium Riser for ST-1220 [Item #STS-1220-ST]
- Titanium Riser for ST-1220-T [Item #STS-1220-T]

Warming Tray

Electric Requirements:

Model #	Voltage	Phase	Hertz	Watts	Amps	Plug
ST-1220 (US)	110-120	1	60	230 W	1.9	NEMA 5-15P
ST-1220-T (US)	110-120	1	60	230 W	1.9	NEMA 5-15P
ST-3915-T (US)	110-120	1	60	450 W	3.8	NEMA 5-15P
ST-1223 (Int'l)	220-240	1	50-60	230 W	1.0	CEE-7/7 16A Schuko
ST-1223U (UK)	220-240	1	50-60	230 W	1.0	BS 1363 (13A) U.K.

Key Dimensions:

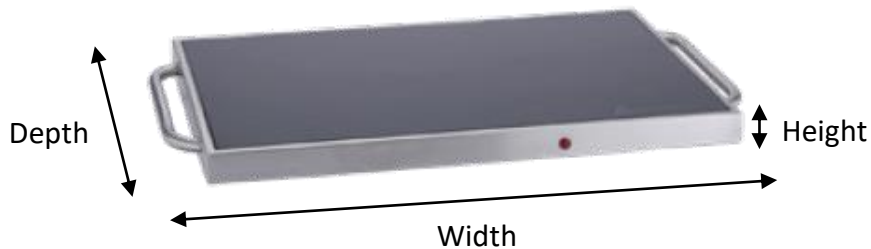

Model #	Width	Depth	Height	Weight
ST-1220 (US)	24.2" (615 mm)	13.8" (351 mm)	1.9" (48 mm)	11.4 lb. (5.2 kg)
ST-1220-T (US)	23.8" (605 mm)	13.0" (330 mm)	2.0" (51 mm)	11.4 lb. (5.2 kg)
ST-3915-T (US)	38.5" (978 mm)	13.8" (351 mm)	2.0" (51 mm)	21.2 lb. (9.6 kg)
ST-1223 (Int'l)	24.2" (615 mm)	13.8" (351 mm)	1.9" (48 mm)	11.4 lb. (5.2 kg)
ST-1223U (UK)	24.2" (615 mm)	13.8" (351 mm)	1.9" (48 mm)	11.4 lb. (5.2 kg)



Project _____

Item # _____ Quantity _____

Model # _____

Warming Tray

Shipping Dimensions:

Single Unit Shipping Carton				
Model #	Length	Width	Height	Weight
ST-1220 (US)	25.6" (650 mm)	3.2" (80 mm)	17.5" (445 mm)	13.2 lb. (6.0 kg)
ST-1220-T (US)	25.6" (650 mm)	3.2" (80 mm)	17.5" (445 mm)	13.2 lb. (6.0 kg)
ST-3915-T (US)	42.3" (1074 mm)	3.2" (80 mm)	17.5" (445 mm)	23.5 lb. (10.6 kg)
ST-1223 (Int'l)	25.6" (650 mm)	3.2" (80 mm)	17.5" (445 mm)	13.2 lb. (6.0 kg)
ST-1223U (UK)	25.6" (650 mm)	3.2" (80 mm)	17.5" (445 mm)	13.2 lb. (6.0 kg)

Notes & Conditions:

1. Vessels with a flat bottom or without feet work best with the Warming Tray.
2. The whole glass surface of the Warming Tray becomes hot regardless of where a vessel is placed. Do not operate unattended.
3. Actual surface temperature may vary due to the ambient temperature in the immediate surrounding area.
4. Discontinue use if the glass surface is cracked or broken.