



Project Name: _____

Item#: _____

Quantity: _____

INDUCTION
dot.



Item #	Application	# Of Heating Zones	Peak Power
SM-360R	Holding	1	360 W

Description:

Spring USA’s DOT induction range is a portable, product holding range with one round heating zone intended for countertop use and drop-in. The range features a durable round housing, a Stainless-Steel rim for drop-in uses, and touch controls panel.

Construction & Performance Features:

- Sleek round housing with a diameter of 8” glass and 9.125” with SS rim.
- Low profile round shape with height of 3.2”.
- Rugged, 5-mm thick, easy to clean, tempered glass top.
- Non-skid, non-scratch footing
- 6’ power cord with plug
- Touch Controls with indicator lights.
- Power level: Low, Low-Med, Med-High, High
- Capable of Daisy-Chain up to 4 units on 15-AMP circuit.

Standard Warranty:

Spring USA induction ranges offer a one-year, overnight exchange warranty (continental US only), from the date of invoice, against manufacturers defects. See SpringUSA.com for more details.

Agency Listings:

- ETL
- UL 197
- CSA C22.2 #109 (cETL)
- NSF certified.



Available Accessories/Alternate Configurations:

- Induction-ready cookware & serving vessels [Spring USA Catalog]
- Above counter Stand w/ control holder
- Under counter mount
- Control Panel Cover
- Surface Guard
- Custom tabletop induction featuring SmartStone®
- Cooking utensils [Spring USA Catalog]



Project Name: _____

Item#: _____



Quantity: _____

_____ DOT _____

Electrical Requirements:

Item#	Volts	Phase	Hertz	Watts	Amps	Plug
SM-360R	110v - 120V	1	60	360 W	3 AMP	NEMA5-15P

Key Dimensions:

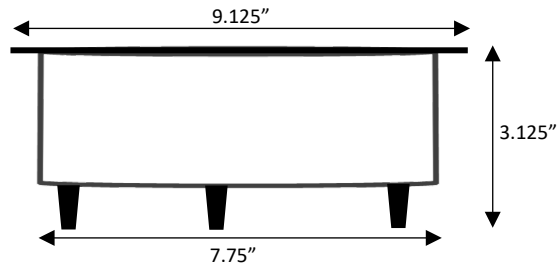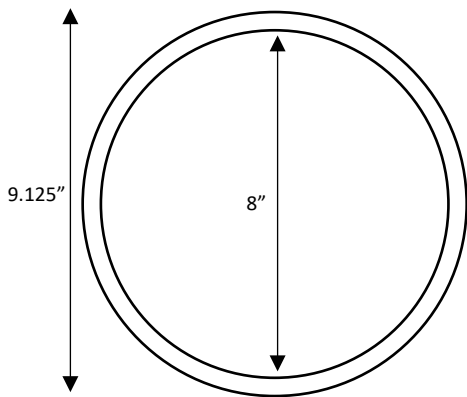

Net Weight: 4.2LBS.

Shipping Dimensions:

Single Unit Carton				
Item #	Length	Width	Height	Weight
SM-360R	13.75"	11.5"	4.5"	5.45 LBS

Notes & Conditions:

- For optimum performance, allow 1.18" (3 cm) clearance from all sides for air circulation. **Proper ventilation must be provided at all times.**
- Actual range temperature may vary due to a number of variables, such as ambient temperature in the immediate surrounding area, content and volume of food being heated or cooked, and whether or not you are using a cover on the serving vessel.
- This induction range requires use of ferrous metal, induction ready cookware.
- Spring USA Induction Servers and Induction Warmers/Ranges are designed to work together as a system. Optimal performance is achieved by using Spring USA components in conjunction with each other. As the first to offer such induction systems, Spring USA cannot warranty the performance of facsimile products offered by other companies.